

H2O Worldwide

H2O 2.0 & 2.2 Instructions & Diagram

No Tools Required


H2O 2.0

Siphon Feed



H2O 2.2

Siphon Feed

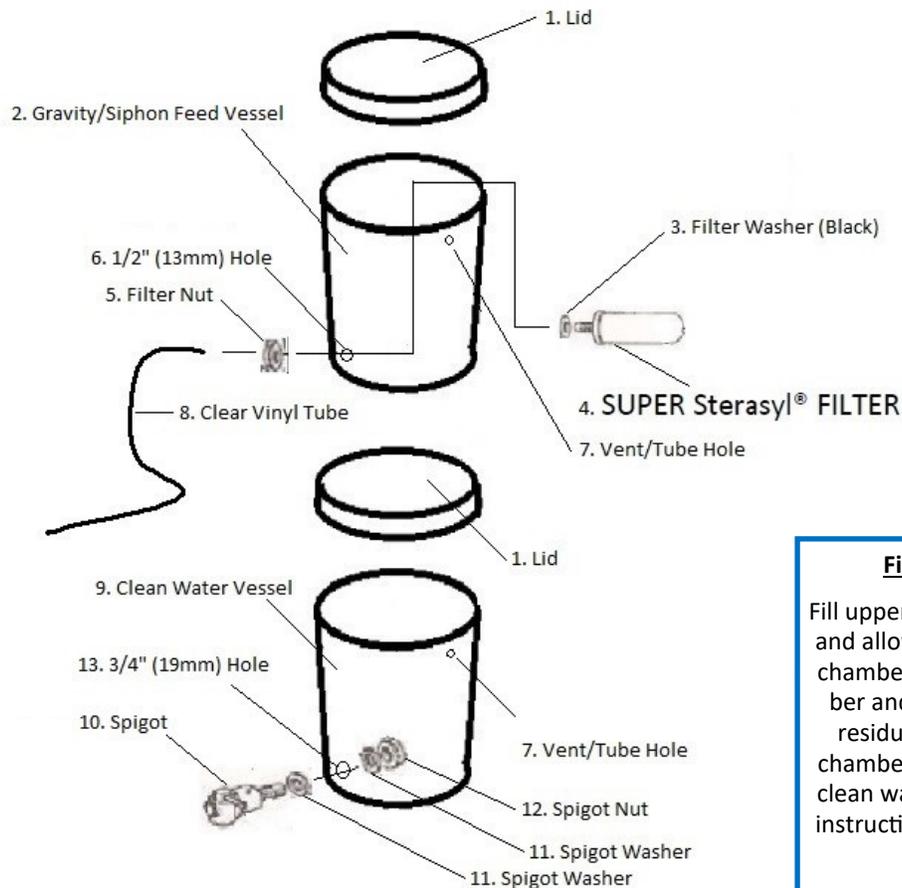

H2O 2.2

Gravity & Siphon Feed



Filter Activation

Fill upper chamber with water and allow to drain into lower chamber. Drain lower chamber and discard. Clean any residue, then refill upper chamber, it's ready to make clean water. Please see filter instructions for more details.



- Place (3) Filter Washer on (4) Super Sterasyl Filter, insert through (6) hole and screw on (5) Filter Nut snugly by hand.
- Insert (8) Clear Vinyl Tube into Filter opening, use a twisting motion and must be inserted approx. 1/2" (19mm).
- H2O 2.0 is now ready, pour water to be purified into (2) and use any clean container to collect clean water. Best flow rate (approx. 4 liters/hr) will be to place H2O 2.0 at least 3' (1m) above collection container. If air bubbles are in the tube re-check tube to filter for tight fit. To stop flow, place tube in (7) Vent hole (about 3" (8cm)).
- Assemble H2O (9) Clean Water Vessel by inserting (10) Spigot with one (11) Spigot Washer through 3/4" (19mm) hole. Place (11) Spigot Washer on Spigot thread and screw on (12) Spigot Nut, hand tighten snugly (if any there is any water seepage around Spigot recheck Spigot Nut for tightness). Place (1) Lid on Clean Water Vessel.
- H2O 2.2 is now ready, to use Gravity & Suction Feed place (2) Feed Vessel on top of (9) Clean Water Vessel and insert (8) tube into (7) Vent/Tube Hole completely. Flow rate will be approx. 1.5+ liters/hr.
- H2O 2.2 Siphon Feed refer to Step 3 and insert tube into (7) Vent/Tube Hole about 1' (30cm).
- When water flow rates are reduced, remove filter and clean according to Super Sterasyl Filter Instructions.
- If contaminated water has a lot of dirt/mud recommend straining water through a cloth first to increase the life of the filter.